



# Analysis of gaseous polycyclic aromatic hydrocarbon emissions from cooking devices in selected rural and urban kitchens in Bomet and Narok counties of Kenya

A. O. Adeola · S. A. Nsibande · A. M. Osano · J. K. Maghanga · Y. Naudé · P. B. C. Forbes

Received: 10 December 2021 / Accepted: 21 April 2022

© The Author(s), under exclusive licence to Springer Nature Switzerland AG 2022

**Abstract** Traditional combustion devices and fuels such as charcoal, wood and biomass, are widely utilised in rural and urban households in Africa. Incomplete combustion can generate air pollutants which are of human toxicological importance, including polycyclic aromatic hydrocarbons (PAHs). In this study, portable multi-channel polydimethylsiloxane rubber traps were used to sample gas phase emissions from cooking devices used in urban and rural households in Bomet and Narok counties of Kenya. A wide range of total PAH concentrations was found in samples collected (0.82 – 173.69  $\mu\text{g}/\text{m}^3$ ), which could be attributed to the differences in fuel type, combustion device, climate, and nature of households. Wood combustion using the 3-stone device had the highest average total PAH concentration of  $\sim 71 \mu\text{g}/\text{m}^3$ . Narok

had higher indoor total gas phase PAH concentrations averaging 35.88  $\mu\text{g}/\text{m}^3$  in urban and 70.84  $\mu\text{g}/\text{m}^3$  in rural households, compared to Bomet county (2.91  $\mu\text{g}/\text{m}^3$  in urban and 9.09  $\mu\text{g}/\text{m}^3$  in rural households). Ambient total gas phase PAH concentrations were more similar (Narok: 1.26 – 6.28  $\mu\text{g}/\text{m}^3$  and Bomet: 2.44 – 6.30  $\mu\text{g}/\text{m}^3$ ). Although the 3-stone device and burning of wood accounted for higher PAH emissions, the charcoal burning jiko stove produced the highest toxic equivalence quotient. Monitoring of PAHs emitted by these cooking devices and fuels is critical to public health and sustainable pollution mitigation.

**Keywords** Polycyclic aromatic hydrocarbon · Combustion device · Household combustion · Domestic air quality

**Supplementary Information** The online version contains supplementary material available at <https://doi.org/10.1007/s10661-022-10062-3>.

A. O. Adeola · S. A. Nsibande · Y. Naudé · P. B. C. Forbes (✉)  
Chemistry Department, University of Pretoria, Pretoria, South Africa  
e-mail: patricia.forbes@up.ac.za

A. M. Osano  
Department of Mathematics and Physical Sciences, Maasai Mara University, Narok, Kenya

J. K. Maghanga  
School of Science and Informatics, Taita Taveta University, Voi, Kenya

## Introduction

A vast portion of the population, particularly in developing countries, relies on solid fuels like wood, charcoal, dung, crop wastes, and traditional stoves for heating and cooking (Bonjour et al., 2013; Johansson et al., 2012). This is a common challenge in African countries where over 600 million people still rely on traditional sources of energy to meet their basic energy needs (Makonese et al., 2018, WHO, 2016). The challenge with traditional energy sources is the emission of potentially harmful toxic compounds

which can pose serious human health effects through inhalation (Yury et al., 2018). These emissions can have a negative impact on indoor air quality, which is a vital determinant of global health as humans spend up to 90% of their time indoors (Klepeis et al., 2001). Studies conducted by the Global Burden of Disease established that approximately 3.5 million premature deaths worldwide and various health issues (e.g., cancer and cardiovascular diseases) can be associated with exposure to smoke from households (Patelaru & Kelly, 2014; Suter et al., 2018).

Emissions from household combustion devices can consist of various organic aerosols, the detailed analysis of which may require the use of pollution markers as surrogates for the pollutant species. Polycyclic aromatic hydrocarbons (PAHs) are a common class of combustion products and have received global interest as markers for assessing indoor air pollution (Chen et al., 2016; Riva et al., 2011; Shen et al., 2017; Shen et al., 2013).

PAHs are a class of semi-volatile organic compounds with two or more fused benzene rings in different configurations. These compounds are of toxicological interest due to their potential mutagenicity and carcinogenicity (Boström et al., 2002; Umbuzeiro et al., 2008). Their occurrence in the air is mainly as a result of pyrolysis or incomplete combustion of organic matter including wood, charcoal, coke, gas, and diesel. Besides these anthropogenic sources, other natural sources of PAHs include forest fires and volcanic eruptions. About 60% of the 16 US EPA priority PAHs are associated with solid fuel combustion (Shen et al., 2013). In countries like Finland, Chile, and the USA, the 16 US EPA priority PAHs arising from residential wood combustion constitute 78, 72, and 46% of the national PAH emission totals, respectively (Shen et al., 2017; Shen et al., 2013).

One of the possible challenges for the lack of widespread air monitoring of PAHs is the complex and expensive sampling and extraction techniques typically required. Multi-channel polydimethylsiloxane (PDMS) rubber traps have been successfully used by our group as sorbents for sampling gaseous PAHs in different studies (Forbes & Rohwer, 2015; Forbes et al., 2013; Geldenhuys et al., 2015). The versatility of these simple sampling devices for airborne PAHs

has been demonstrated in various applications including sugarcane burning emissions, tunnel air pollution studies, household fire emissions, and diesel emissions from underground mining (Forbes & Rohwer, 2009; Forbes et al., 2013; Geldenhuys et al., 2015; Munyeza et al., 2020).

Review of studies from African countries suggests that there is still limited data on the occurrence of atmospheric PAHs and their associated health effects (Kalisa et al., 2019; Munyeza et al., 2019). This is of great concern, as most developing African countries still rely on solid organic matter (wood, charcoal, etc.) as fuel sources. For example, about 85% of households in Kenya mainly use wood as a source of fuel in cooking devices under poorly ventilated conditions (Lisouza et al., 2011; Osano et al., 2020; Rahnama et al., 2017). While there have been studies conducted on the general use and performance of cooking devices in Kenya (Adkins et al., 2010; Lozier et al., 2016; Osano et al., 2020; Pilishvili et al., 2016; Tigabu, 2017), there has been limited reporting on the quantification of PAHs that are emitted by these devices (Gachanja & Worsfold, 1993; Lisouza et al., 2011).

The study by Gachanja and Worsfold (1993) looked at particulate-bound and gaseous PAHs from charcoal stoves that are commonly used in Kenya, specifically ceramic-lined and traditional metal stoves. They found that the ceramic stoves produced significantly lower PAH emissions compared to the traditional counterpart which were 33% higher. On the other hand, the study by Lisouza et al. (2011) focused on PAHs in soot emissions from traditional thatched rural households in Western Kenya, and did not take into consideration gas phase PAH concentrations. While these studies provide some useful insights on the PAH levels, they are limited in that (i) they did not consider PAH levels in the breathing zones of those tending the combustion device in urban and household kitchens, (ii) they did not study the ambient concentrations of PAHs which are important for human health assessments, and (iii) they did not study PAHs in the gas phase, but rather focused solely on particulate PAH concentrations. These gaps were addressed in a study conducted by our research group, which focused on households in coastal counties of Kenya (Munyeza et al., 2020).

The objective of the present study was to expand on the previous campaign in characterizing and quantifying indoor PAH levels from cooking devices in both rural and urban households in selected inland counties of Kenya, namely Bomet and Narok. This extension from our previous study was important in order to take into consideration variations in fuel availability, cultural practices, climate, altitude, and different home dwellings. PDMS rubber traps were again utilized as simple and cost-effective samplers for gas phase PAHs and these were subsequently extracted using an in-house developed plunger-assisted solvent extraction (PASE) technique, followed by analysis with gas chromatography-mass spectrometry (GC-MS). This study will provide useful insights into the possible factors that can influence indoor PAH levels emitted from cooking devices. Factors such as the population density, type of dwelling, ventilation, geographical location and related climate, source of fuel, and type of combustion device for each of the sampling areas were explored. Such information can serve as a basis for improving household energy usage in order to mitigate the potentially harmful PAH emissions that combustion devices generate.

## Materials and methods

### Sample collection

The air sampling campaign was conducted in October 2019, at the various sites detailed in Table 1. Sampling was conducted in two counties in southwestern Kenya, namely Bomet and Narok, as shown in Fig. 1. The population, land area, and population density of the two counties are presented in Table S1 of the Supplementary Information. For each study area, samples were taken from cooking devices in urban and rural dwellings, and ambient samples were also taken in each area.

### Air sampling

The traps used for air sampling were pre-conditioned in an off-line Gerstel™ TC 2 tube conditioner (Chemtrix, Midrand, South Africa) using a hydrogen gas flow of 100 mL min<sup>-1</sup>. Field samples of combustion emissions were taken using PDMS traps as shown

in Fig. 2 (consisting of 22 parallel PDMS tubes of 0.3 mm i.d. compactly arranged in a 178-mm long glass tube) coupled to a portable GilAir® Plus sampling pump (Sensidyne® Industrial Health and Safety Instrument, Florida, USA) which was operated at a flow rate of 500 mL min<sup>-1</sup> for 10 min (total volume of air sampled per trap was ~5 L). Throughout the sampling campaign, the PDMS traps were positioned at a consistent distance of 65 cm from the stove and 36 cm above the ground (Fig. 3). Duplicate samples were taken in some cases (Table 1).

Furthermore, in all cases, the same aluminum cooking pot containing 1 L of water was used and the water was heated to boiling point before sampling commenced. For each sampling point, the sampling position, type of fuel, combustion device, and type of dwelling were noted and are presented in Table 1. The majority of the households used either wood or charcoal as a source of fuel, and the common stoves were the jiko, the 3-stone or improved 3-stone stove, and the kerosene stove. This is consistent with an initial survey study that was conducted by our group (Osano et al., 2020).

Indoor ambient conditions (temperature and altitude) were measured using a Kestrel 4500 portable weather station (Kestrel Weather and Environmental Meters, Boothwyn, USA). Ambient gas phase samples were taken outdoors away from buildings at 1 m above the ground. For quality control purposes, field blank samples were collected for each of the four sampling regions and these were subjected to the same treatment as the emission samples.

After sampling, the PDMS traps were sealed with glass caps, wrapped in aluminum foil, and stored in a cooler box with ice packs to ensure their integrity during transportation. The samples were stored in the laboratory in a freezer at -18 °C prior to analysis.

### Chemicals and reagents

The overall analytical procedure, including calibration, was performed using a certified standard PAH mix solution (Supelco, USA) containing 15 US EPA priority PAHs. The nominal concentration of each compound in the mixture dissolved in methylene chloride was 2000 ng/μL. Stock solutions were prepared in n-hexane and working solutions in the range of 0.5–4 ng/μL were prepared by appropriate dilutions of the stock solutions before use. All solvents


**Table 1** Details of dwelling type, sampling location, fuel type, and combustion device used in various households in Bomet and Narok counties

Household (HH#)	Sample abbreviation	Type of dwelling	Combustion device	Type of fuel	Sampling position	Location description
Bomet urban ambient	BU-AMB	n/a	n/a	n/a	1 m above ground level	About 100 m from Bomet urban household #1 (HH#1) at the end of the dirt road (at T-junction of another dirt road)
Bomet urban HH#1 (duplicate samples)	BU-H1A & BU-H1B	Brick house with galvanized zinc roof	Wood stove/Jiko "improved"	Wood—cyprus (small pieces)	In kitchen on stool, 36 cm above ground and 65 cm from the fire	The fire was under a chimney
Bomet urban HH#1	BU-H1C	Brick house with galvanized zinc roof	Jiko	Charcoal	In kitchen on stool, 36 cm above ground and 65 cm from the jiko	The fire was under a chimney
Bomet rural ambient	BR-AMB	n/a	n/a	n/a	1 m above ground level	About 30 m from Bomet rural household #1 (HH#1) (at the end of the dirt driveway where it joined the dirt road) amongst farmland
Bomet rural HH#1 (sample 1)	BR-H1A	Wooden house with galvanized zinc roof	Improved stove (cement structure)	Wood cyprus	In kitchen on stool, 36 cm above ground and 65 cm from the fire	Well-ventilated kitchen with open windows
Bomet rural HH#1 (sample 2)	BR-H1B	Wooden house with galvanized zinc roof	Jiko	Briquettes (made from sawdust and bagasse); water had not begun to boil	In kitchen on stool, 36 cm above ground and 65 cm from the jiko	Well-ventilated kitchen with open windows
Bomet rural HH#1 (sample 3)	BR-H1C	Wooden house with galvanized zinc roof	Jiko	Briquettes (made from sawdust and bagasse); second sample from same fire once water had started to boil	In kitchen on stool, 36 cm above ground and 65 cm from the jiko	Well-ventilated kitchen with open windows
Bomet rural HH#1 (sample 4)	BR-H1D	Wooden house with galvanized zinc roof	Improved jiko	Charcoal (from wood fire in sample 1)	In lounge area/veranda adjacent to the kitchen, 36 cm above ground and 65 cm from the jiko	Sampled in this area to prevent cross contamination from previous combustion in the kitchen. Well ventilated with open door and windows

Table 1 (continued)

Household (HH#)	Sample abbreviation	Type of dwelling	Combustion device	Type of fuel	Sampling position	Location description
Narok urban ambient	NU-AMB	n/a	n/a	n/a	1 m above ground level	Adjacent to dirt road near Maasai Mara University
Narok urban HH#1 (duplicate samples)	NU-H1A & NU-H1B	Zinc with galvanized zinc roof	Kerosene stove	Kerosene	On stool in kitchen, 36 cm above ground and 40 cm from the stove	Inside zinc kitchen
Narok urban HH#2	NU-H2A	Open outdoor shack made of plastic with wooden supports outside the house	3-stone	Wood and sticks	Outdoors next to zinc kitchen on a stool, 36 cm above ground and 87 cm from the fire	Plastic shelter around fire used for outdoor cooking
Narok urban HH#2	NU-H2B	Brick	Jiko	Charcoal	On stool in kitchen, 36 cm above ground and 65 cm from the jiko	Kitchen located inside house, with open door and window
Maasai Mara University (duplicate samples)	MMU-A & MMU-B	Brick with tiled roof. Ground floor of 2-story building	Jiko	Briquettes doped with sodium citrate	In student office, 36 cm above ground and 65 cm from the jiko	Open door and window
Narok rural ambient	NR-AMB	n/a	n/a	n/a	1 m above ground level	In farmyard in open farming area
Narok rural HH#1 (semi-rural)	NR-H1	Mud walls and galvanized zinc roof	3-stone type	Wood	On stool in kitchen, 36 cm above ground and 65 cm from the fire	Inside kitchen with an open door and window
Narok rural HH#2	NR-H2	Galvanized zinc shack	Jiko	Charcoal (from wood fire in sample 1)	On stool in kitchen, 36 cm above ground and 65 cm from the jiko	In separate kitchen shack (with door but no windows) adjacent to the house
Narok rural HH#3	NR-H3	Manyata with clay/dung walls and roof	3-stone type	Wood	On stool in kitchen, 36 cm above ground and 70 cm from the fire	Bedroom led directly off kitchen with very limited ventilation (no windows)

**Fig. 1** Map of Kenya showing the sampling locations in Bomet and Narok

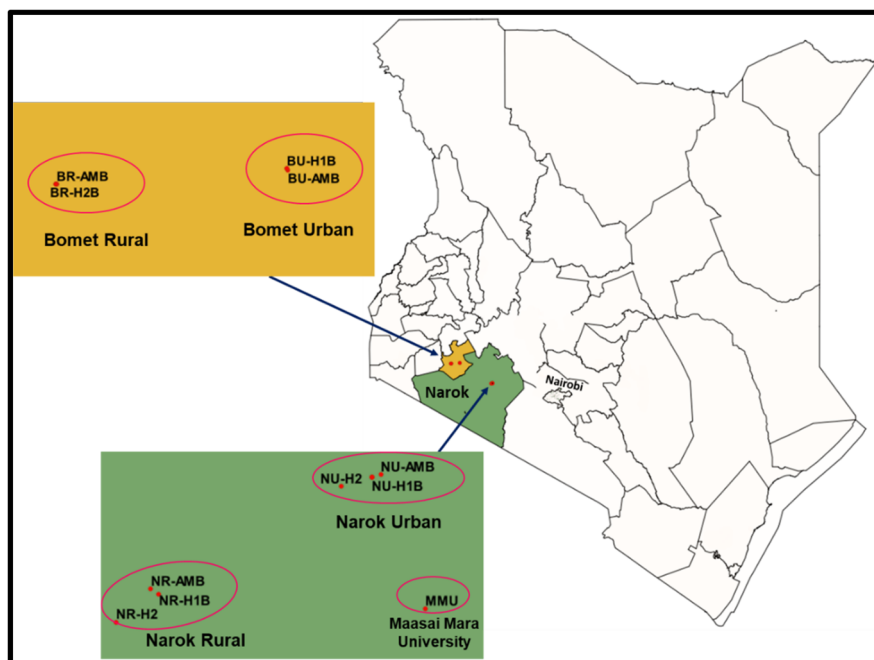


including toluene and n-hexane were of analytical grade (99% purity) and were purchased from Sigma-Aldrich (Bellefonte, USA).

#### Extraction and GC–MS analysis of PAHs


All samples were extracted using the PASE method developed by Munyeza et al. (2018). Briefly, the traps were plunged 10 times with two portions of 1 mL hexane which were then combined to give a total volume of 2 mL. These extracts were concentrated by blowing down with nitrogen to near dryness, after

which they were reconstituted in 100  $\mu$ L hexane in amber vials. Pre-washed plungers, clean vials, and pure solvents were used for the PASE extraction of each sample to prevent carryover of samples or cross contamination. Sequential extractions were carried out with fresh portions of solvent to reduce losses due to trace analytes that may remain in the residual solvent in the PDMS tubes or heavy PAHs that may adhere to the glass walls. Two sequential extractions have been shown to result in optimum overall extraction efficiencies of the target PAHs, which ranged from 76% for naphthalene to 99% for phenanthrene, with percentage relative standard deviations (%RSDs)

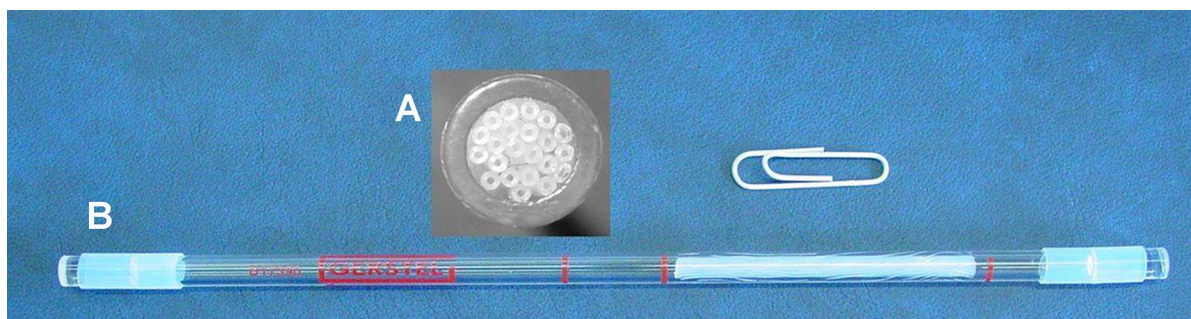

**Fig. 2** The PDMS sampling trap used in the study in **A** cross section and **B** side view showing glass storage end caps held in place with Teflon (reprinted from Naudé et al. (2009) with permission from Elsevier)

**Fig. 3** Typical sampling setup used at **A** Narok rural HH#1 (improved 3-stone), **B** Bomet rural HH#1 (improved 3-stone), **C** Bomet urban HH#1 (Jiko), and **D** Narok urban HH#2 (Jiko). For all samples, the PDMS trap was positioned at 65 cm from the stove and at a height of 36 cm above the ground

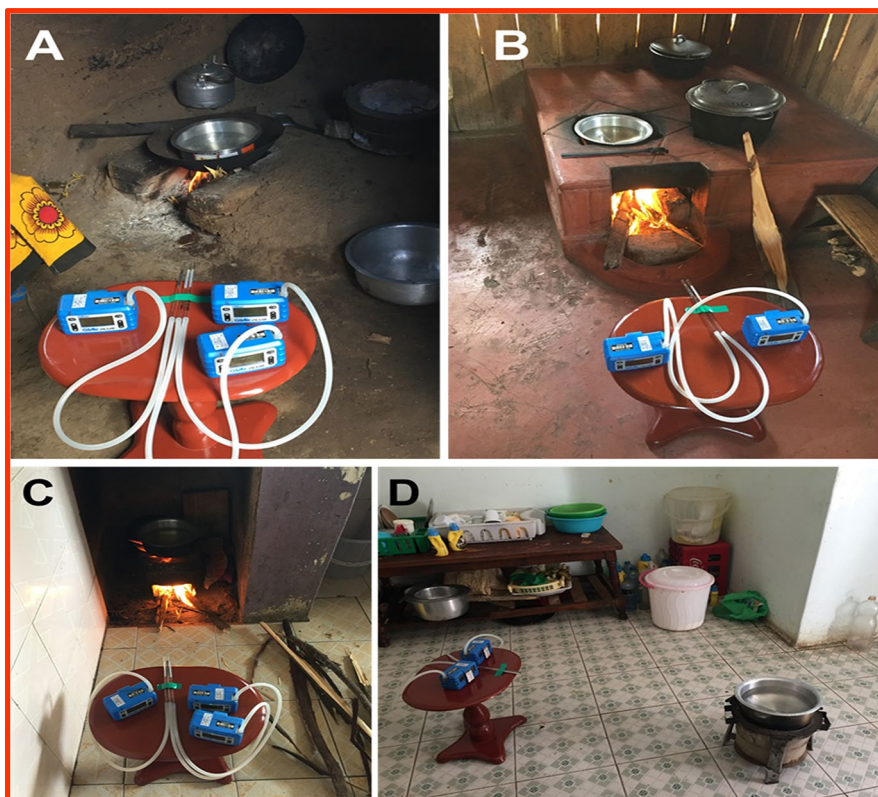

below 6% (Munyeza et al., 2018). The enhanced recovery due to sequential extraction was more evident for heavier target PAHs (4–6 rings). Relatively lower recoveries of lower molecular weight PAHs may be due to losses due to volatilization, especially for naphthalene.

Sample analysis was performed using a gas chromatograph (GC, Agilent 6890) connected to a mass spectrometer (MSD, Agilent 5975C) in electron impact ionization mode. The GC-MSD conditions are provided in Table 2. A mass range of  $m/z$  40–350 was recorded in full scan mode. Compounds were identified based on a comparison of retention times and mass spectra to those of pure individual standards. For better sensitivity, the selected ion monitoring (SIM) mode was employed to detect compounds and quantify the analytes (Table 3).

Quantification of the selected PAHs was carried out using seven-point calibration curves. The calibration was set up by spiking of traps with concentrations ranging from 0.5 to 4 ng/ $\mu$ L (including blanks) for the 15 US EPA priority PAHs included in this

study, and the abbreviations of which are provided in Table 3. The limit of detection (LOD) and limit of quantification (LOQ) were calculated as 3 times and 10 times the S/N ratio (Table 4). Samples were corrected for PAHs found on the respective field blank sample for that area.

#### Toxic equivalent quotient determination

The carcinogenicity of a PAH mixture or inhalation risk is often described in terms of its TEQ value, similar to the benzo[a]pyrene equivalent concentration ( $B[a]P_{eq}$ ) (Munyeza et al., 2020; Xia et al., 2013). The TEQ of gas phase PAH emissions from different cooking devices in this study was calculated according to Eq. (1):

$$TEQ \text{ or } B[a]P_{eq} = \sum_{i=1}^n C_i \times TEF_i \quad (1)$$

$C_i$  = concentration of the PAH congener  $i$ ;  $TEF_i$  = the toxicity equivalency factor (TEF) of PAH congener  $i$  (Table S2).

**Table 2** GC-MSD conditions employed in the analysis of PAHs in PASE extracted samples

Parameter	Details
Column	Restek Rxi <sup>®</sup> -PAH
Column dimensions	60 m, 0.25 mm ID, 0.10 $\mu\text{m}$ $d_f$
Oven program	80 °C (1 min), 30 °C/min to 180 °C, 2 °C/min to 320 °C
Injection volume	1 $\mu\text{L}$
Inlet mode	Splitless (1 min), purge flow 30 mL/min (1 min)
Inlet liner	Restek SKY <sup>™</sup> precision splitless liner without wool
Solvent delay	6.5 min
Inlet temperature	275 °C
Carrier gas	Helium, constant flow mode, 1 mL/min
Transfer line temperature	300 °C
Ionization energy	70 eV, electron impact mode (EI+)
Mode of detection: Compound identification/confirmation	Full scan mode m/z 40–350
Mode of detection: Quantification	Selected ion monitoring mode (SIM) m/z 128, 136, 152, 154, 166, 178, 188, 202, 212, 228, 240, 252, 276, 278
MS temperature	230 °C (ion source), 150 °C (quadrupole)
Total run time	74.33 min

## Results and discussion

### PAH quantitation

The calibration method was employed for the quantification of target PAHs and correlation coefficients ( $R^2$ ) for all analytes were higher than 0.920 (Table 3). The limits of detection (LODs) and limits

of quantification (LOQs) based on average sample volumes (0.005  $\text{m}^3$ ) were also evaluated and are reported in Table 4. The concentration of PAHs sampled on each trap was calculated using Eq. (2):

$$C_{PAH} = \frac{M_v}{V_{air}} \quad (2)$$

**Table 3** List of PAHs included in this study. Chemical formulae and number of fused benzene rings are shown along with the linear regression ( $R^2$ ) calibration correlations ( $n=3$ )

Analyte (PAH)	Abbreviation	Quantification ion (m/z)	Formula	Number of rings	$R^2$
Naphthalene	Nap	128	$\text{C}_{10}\text{H}_8$	2	0.992
Acenaphthylene	Acy	152	$\text{C}_{12}\text{H}_8$	3	0.987
Acenaphthene	Ace	154	$\text{C}_{12}\text{H}_{10}$	3	0.988
Fluorene	Flu	166	$\text{C}_{13}\text{H}_{10}$	3	0.988
Phenanthrene	Phen	178	$\text{C}_{14}\text{H}_{10}$	3	0.981
Anthracene	Ant	178	$\text{C}_{14}\text{H}_{10}$	3	0.946
Fluoranthene	FluAn	202	$\text{C}_{16}\text{H}_{10}$	4	0.989
Pyrene	Pyr	202	$\text{C}_{16}\text{H}_{10}$	4	0.984
Benzo[a]anthracene	BaA	228	$\text{C}_{18}\text{H}_{12}$	4	0.984
Chrysene	Chry	228	$\text{C}_{18}\text{H}_{12}$	4	0.944
Benzo[k]fluoranthene	BkF	252	$\text{C}_{20}\text{H}_{12}$	5	0.924
Benzo[a]pyrene	BaP	252	$\text{C}_{20}\text{H}_{12}$	5	0.937
Dibenz[a,h]anthracene	DahA	278	$\text{C}_{22}\text{H}_{14}$	5	0.998
Indeno[1,2,3-cd]pyrene	IcdP	276	$\text{C}_{22}\text{H}_{12}$	6	0.929
Benzo[g,h,i]perylene	BghiP	276	$\text{C}_{22}\text{H}_{12}$	6	0.949



**Table 4** Limits of detection (LODs) and limits of quantitation (LOQs) of PAHs based on SIM ions for the PASE method. The LOD was calculated based on a signal to noise (S/N) ratio of 3 and the LOQ on a S/N ratio of 10

Target analyte (PAH)	LOD (injected) (ng/μL)	LOD (trap) (ng/100 μL)	Calculated LOD (μg/m <sup>3</sup> )	LOQ (injected) (ng/μL)	LOD (trap) (ng/100 μL)	Calculated LOQ (μg/m <sup>3</sup> )
Nap	0.005	0.5	0.10	0.016	1.6	0.320
Acy	0.003	0.3	0.06	0.009	0.9	0.180
Ace	0.002	0.2	0.04	0.006	0.6	0.120
Flu	0.007	0.7	0.14	0.024	2.4	0.480
Phen	0.003	0.3	0.06	0.009	0.9	0.180
Ant	0.004	0.4	0.08	0.015	1.5	0.300
FluAn	0.006	0.6	0.12	0.020	2.0	0.400
Pyr	0.003	0.3	0.06	0.011	1.1	0.220
BaA	0.002	0.2	0.04	0.005	0.5	0.100
Chry	0.007	0.7	0.14	0.022	2.2	0.440
BkF	0.001	0.1	0.02	0.003	0.3	0.060
BaP	0.002	0.2	0.04	0.007	0.7	0.140
DahA	0.025	2.5	0.50	0.082	8.2	1.640
IcdP	0.006	0.6	0.12	0.018	1.8	0.360
BghiP	0.003	0.3	0.06	0.010	1.0	0.200


where  $C_{PAH}$  is the concentration of each PAH per unit volume of air sampled ( $\mu\text{g}/\text{m}^3$ );  $M_v$  (ng) is the amount of target analyte determined from the linear regression calibration equations ( $\text{ng}/\mu\text{L}$ ), divided by 1000 (to convert to  $\mu\text{g}$ ), and multiplied by the volume of final extract (100  $\mu\text{L}$ ); and  $V_{air}$  is the volume of air sampled on the PDMS trap ( $\sim 0.005 \text{ m}^3$ ).

The plunger-assisted solvent extraction (PASE) method described by Munyeza et al. (2018) was employed for the analysis of samples collected from indoor cooking-related combustion activities and ambient air samples, with a final extract volume after blowdown under  $\text{N}_2$  of 100  $\mu\text{L}$ . For improved sensitivity and selectivity, the selective ion monitoring (SIM) mode was employed to quantify the target PAHs (Adeola & Forbes, 2020; Munyeza et al., 2018). A representative SIM chromatogram is shown in Figure S1. Carryover between samples and contamination from solvent blanks did not occur, as PAHs were not detected in analytical grade solvents (99% purity) injected between sample runs. A trace amount of target compounds, especially volatile naphthalene, was detected in field blank samples and was deducted from sample concentrations accordingly. The Narok urban field blank sample was lost during analysis; thus, the average of the other three field blanks was used for correction of Narok urban samples.

Seven target PAHs out of the 15 US EPA priority PAHs were above the limit of quantification (LOQ) in the samples (Fig. 4, Table S3). Where analytes were detected in some samples but were  $< \text{LOQ}$  in others in the sample set (for example within Bomet rural samples), the LOQ was used in the calculation of average values as a worst-case scenario. There was a vast variation in the total gas phase indoor concentrations of PAHs in households which were detected, ranging from 0.82 to 173.69  $\mu\text{g}/\text{m}^3$ . Low molecular weight (LMW) PAHs were ubiquitous in the gaseous phase due to their relatively high vapor pressure; however, they are less toxic to humans. The high molecular weight (HMW) PAHs are more predominant in the particulate phase due to their low vapor pressures, with proven carcinogenicity (Dat & Chang, 2017). The particle phase was not sampled in this study due to low sampling volumes, which would have resulted in particle phase PAH concentrations being below the LODs. The importance of gas phase PAH emissions in determining exposure levels has been previously demonstrated (Geldenhuyts et al., 2015; Munyeza et al., 2020).

Generally, Narok County samples had a higher average total PAH concentration, ranging from 70.84  $\mu\text{g}/\text{m}^3$  in rural homes to 35.88  $\mu\text{g}/\text{m}^3$  in urban households, compared to Bomet County (9.09  $\mu\text{g}/\text{m}^3$  in rural homes

**Fig. 4** Average gaseous PAH concentrations in urban and rural households of Narok and Bomet counties of Kenya. LOQs were used in the average calculation where [analyte] < LOQ

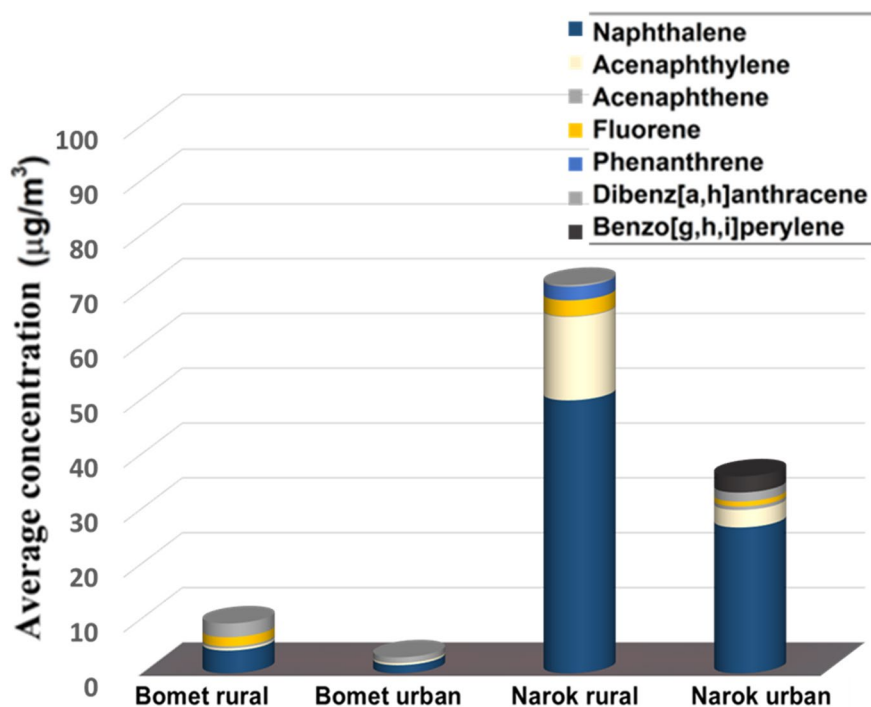

to 2.91  $\mu\text{g}/\text{m}^3$  in urban households) (Table 5). This could be attributed to the difference in atmospheric conditions, such as relative humidity and temperature, as well as combustion devices, combustion fuel, ventilation, nature of households, etc. (Hellén et al., 2017; Munyeza et al., 2020; Shen et al., 2011; Zou et al., 2003). Other factors that could have contributed to the variation in PAH concentrations and related toxicity are further discussed in the “Role of combustion devices and fuel employed on gas phase PAH emissions,” “PAH variation in rural and urban households,” and “Toxicity assessment of detected gas phase PAHs” sections. Naphthalene was present at the highest concentration in most of the households investigated in this study (Fig. 4, Table S3), similar to earlier reports on combustion of different biomass fuels (Shen et al., 2011; Zou et al., 2003). This could be attributed to the fact that naphthalene has the highest vapor pressure and volatility and lowest molecular weight, thus will readily be found in the gas phase (Abdel-Shafy & Mansour, 2016). Elevated concentrations of naphthalene, as the most abundant PAH in most household kitchens in the study areas, was equally reported by studies carried out in coastal regions of Kenya (Munyeza et al., 2020), Burundi (Viau et al., 2000), and Japanese kitchens (Ohura et al., 2004).

Literature suggests that the total PAH concentration in the gaseous/vapor phase often increases with an increase in temperature, and that lower relative humidity (RH) enhances the burning or combustion of biomass and gaseous release (Hellén et al., 2017). In this study, indoor temperatures averaged 24.3 °C (ranging from 20.6 to 27.9 °C). This may have contributed to the lower gas phase PAH concentrations found in samples collected from Bomet and Narok counties, compared to previous results obtained in Mombasa and Taita Taveta where the average indoor temperature was 31 °C (Munyeza et al., 2020). These findings further emphasize the influence of seasonal variations in atmospheric temperature and relative humidity on the occurrence of vapor phase pollutants, and the need for adequate consideration of atmospheric factors in toxicological profiling and risk assessment of PAHs, and other gas phase pollutants.

#### Role of combustion devices and fuel employed on gas phase PAH emissions

Studies have shown that the composition of gaseous emissions varies with different cooking devices and fuel sources (Shen, Tao, et al., 2013). This is because the combustion conditions often influence the concentration

**Table 5** PAH concentrations in  $\mu\text{g m}^{-3}$  in indoor and ambient air from rural and urban inland counties of Kenya

Sampling location	Sample abbreviation	Total PAHs ( $\mu\text{g/m}^3$ )	Average total household PAHs $\pm$ Std Dev ( $\mu\text{g/m}^3$ )
<b>Bomet rural</b>			9.09 $\pm$ 4.13
Bomet rural household 1	BR-H1A	9.63	
Bomet rural household 1	BR-H1B	3.13	
Bomet rural household 1	BR-H1C	12.39	
Bomet rural household 1	BR-H1D	11.20	
Bomet rural ambient	BR-AMB	2.44	2.91 $\pm$ 1.82
<b>Bomet urban</b>			
Bomet urban household 1	BU-H1A	4.16	
Bomet urban household 1	BU-H1B	3.74	
Bomet urban household 1	BU-H1C	0.82	
Bomet urban ambient	BU-AMB	6.30	70.84 $\pm$ 90.58
<b>Narok rural</b>			
Narok rural household 1	NR-H1	35.88	
Narok rural household 2	NR-H2	2.94	
Narok rural household 3	NR-H3	173.69	
Narok rural ambient	NR-AMB	1.26	35.88 $\pm$ 49.59
<b>Narok urban</b>			
Narok urban household 1	NU-H1A	4.60	
Narok urban household 1	NU-H1B	133.10	
Narok urban household 2	NU-H2A	3.96	
Narok urban household 2	NU-H2B	41.68	
Maasai Mara University	MMU-A	19.01	
Maasai Mara University	MMU-B	12.90	
Narok urban ambient	NU-AMB	6.28	

of pollutants that are released during the combustion of fuels, whether clean or not (Orasche et al., 2012, 2013). Therefore, the four most prominent cooking devices found in the study area, which are jiko, 3-stone, improved 3-stone (molded with clay or bricks—see Figure S2), and kerosene stoves, were investigated in this study (Fig. 5).

As illustrated in Fig. 5, the combustion of wood in the 3-stone cooking device, which is a traditional fire-making method for cooking and is still in practice in developing countries, resulted in the highest average total PAH emissions relative to other cooking methods (70.69  $\mu\text{g/m}^3$ ). This is followed by the kerosene stove (68.85  $\mu\text{g/m}^3$ ), the jiko stove with charcoal as a fuel source (12.43  $\mu\text{g/m}^3$ ), and then the improved 3-stone stove (5.69  $\mu\text{g/m}^3$ ), which involves wood combustion but under more controlled conditions than traditional 3-stone stoves. Note that error bars are not included in this figure (and subsequent figures) due to the wide variation in results between

samples. A similar result was reported for wood and charcoal cooking devices in rural areas of Tanzania (Titcombe & Simcik, 2011) and coastal areas of Kenya (Munyeza et al., 2020).

The profiles revealed that the concentrations of naphthalene were far above the concentrations of other PAHs for all cooking devices. Inefficient charcoal production, substandard cooking devices, and burning of wet wood will result in relatively higher PAH emissions, which may lead to variations in emissions reported for the 3-stone, improved 3-stone, and jiko combustion devices in this study. These findings agree with studies that affirm that availability of proper ventilation, nature of wood (moisture content or wood type), and burning duration influences the concentration of smoke and PAHs released in households (Chomanee et al., 2009; Munyeza et al., 2020). It should be noted that substantially better reproducibility in terms of total PAH concentrations between duplicate samples for both wood burning (BU-H1A

and BU-H1B) and briquette burning (MMU-A and MMU-B) jiko stoves was obtained than for the kerosene stove duplicate samples (NU-H1A and NU-H1B). This may point towards poor efficiency of the device tested.


#### PAH variation in rural and urban households

As illustrated in Figs. 4 and 6, there is a marked difference in the concentration of PAHs in rural and urban households. Most rural households are poorly ventilated in general, with poor roofing structures and walls made of clay (Figure S3 and S4). In some cases, no chimneys were present, and the walls and roofs were consequently darkened with the smoke from combustion cooking devices. The housing structure, substandard cooking devices, and dependence on wood of all kinds as fuel could be responsible for the higher PAH concentrations in rural compared to urban kitchens (Table 5). Although the total PAH concentration in rural and urban kitchens in Narok households was far higher than those found in Bomet homes, the ambient PAH concentration in outdoor air samples in rural Bomet was somewhat higher than that found in rural Narok (Fig. 6a, b). This affirms that household PAHs, generated in situ, only contribute a portion to outdoor PAH concentrations and

that several anthropogenic and outdoor activities such as vehicular and industrial emissions, as well as population density, contribute more to ambient PAH concentrations. During the sampling campaign, it was observed that a specific type of Maasai Mara traditional housing called a “manyata” predominates in rural Narok County (Figure S3b, sample NR-H3). This structure holds both the kitchen and bedroom of residents, with very limited ventilation. This contributes to the elevated level of PAHs found in the gas phase in households in rural Narok (Fig. 4) and consequently increases the risk of exposure of residents to toxic gaseous pollutants generated from cooking within their living spaces.

Furthermore, naphthalene, acenaphthylene, acenaphthene, and dibenz(a,h)anthracene were PAHs consistently and prominently detected in samples collected from wood combustion in urban and rural kitchens (Fig. 5). The average  $\Sigma$ PAH level recorded as a result of the combustion of wood was as high as  $173.69 \mu\text{g}/\text{m}^3$  for six detected PAHs. Elevated average  $\Sigma$ PAH levels as high as  $43 \mu\text{g}/\text{m}^3$  for 12 detected PAHs were reported in rural households of Burundi by Viau et al. (2000). Vietnam recorded levels as high as  $957 \mu\text{g}/\text{m}^3$  for 18  $\Sigma$ PAHs (Oanh et al., 1999). An earlier survey carried out revealed that the preference for a particular type of combustion device employed in rural and urban areas

**Fig. 5** Average gaseous PAH concentrations from various combustion devices.  $N_{(3\text{-stone})} = 3$ ,  $N_{(\text{Improved } 3\text{-stone})} = 3$ ,  $N_{(\text{Jiko})} = 8$ ,  $N_{(\text{Kerosene stove})} = 2$ . LOQs were used in the average calculation where  $[\text{analyte}] < \text{LOQ}$

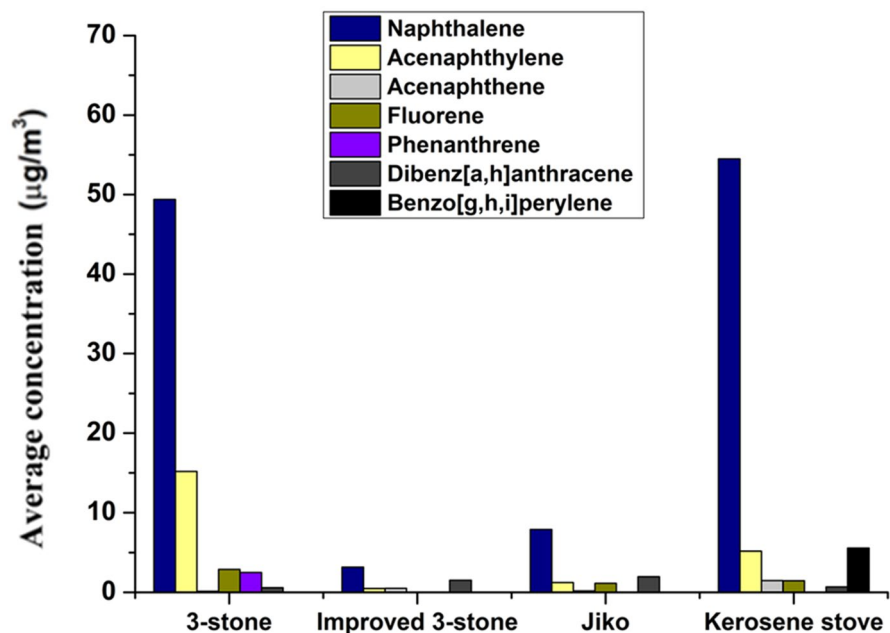

is influenced by the cost of the device, energy required/ cost of fuel type, its availability, and cultural beliefs (Osano et al., 2020).


The pattern revealed in Fig. 6b suggests ambient/ outdoor gas phase air quality with respect to PAHs was better in rural areas of Narok and Bomet, and this is expected due to relatively more anthropogenic activities and higher population density in urban areas that could negatively impact air quality (Table S1). Narok rural is near the Maasai Mara reserve, with much lower population density and limited local sources of PAHs, resulting in less ambient pollution in comparison to Bomet. Furthermore, Bomet is in the South Rift Valley region of southwestern Kenya; thus, the topography and temperate climate of Bomet may reduce the dispersion of air pollutants to some extent (Osano et al., 2020), particularly as it was the wet season.

Primitive or traditional devices such as 3-stone and improved versions thereof were mainly employed in rural areas because they are often self-made and wood is abundant in villages which can be used as firewood; therefore, 3-stone stoves are affordable by rural dwellers. Kerosene stoves, gas stoves, and coal devices (jiko) are mainly prevalent in urban residences as residents could afford them and have access to the fuel required. Discussions with rural dwellers during the sampling campaign also indicated that cooking using traditional methods is part of their cultural heritage and certain local meals such as “ugali”

are considered to be more delicious when made using firewood and a 3-stone device.


### Toxicity assessment of detected gas phase PAHs

The carcinogenic potency and toxicity of PAHs were evaluated in this study, considering the PAH concentrations and relative distribution of different ringed PAHs. The human health risk (carcinogenicity) of PAHs released by the different cooking devices was calculated using toxic equivalence factors (TEFs) proposed by Nisbet and LaGoy (1992). Based on the TEF values and average gas phase PAH concentrations, toxic equivalence quotient (TEQ) values for each device were estimated, as shown in Table S2. The sum of TEQ values of individual PAHs quantified and averaged for each cooking device were 3.0, 7.6, 9.9, and 3.6  $\mu\text{g}/\text{m}^3$  for 3-stone, improved 3-stone, jiko, and kerosene combustion devices, respectively (Fig. 7). Furthermore, although Fig. 5 reveals the highest total PAH emissions from 3-stone stoves, TEQ values suggest that jiko stove emissions are more carcinogenic due to the relatively higher concentration of dibenz[a,h]anthracene released and its toxic equivalence factor (Table S2). Thus, the quality of charcoal should be examined, and process technology involved in charcoal production should be standardized in the study area due to potential carcinogenic risks posed to residents utilizing this fuel.

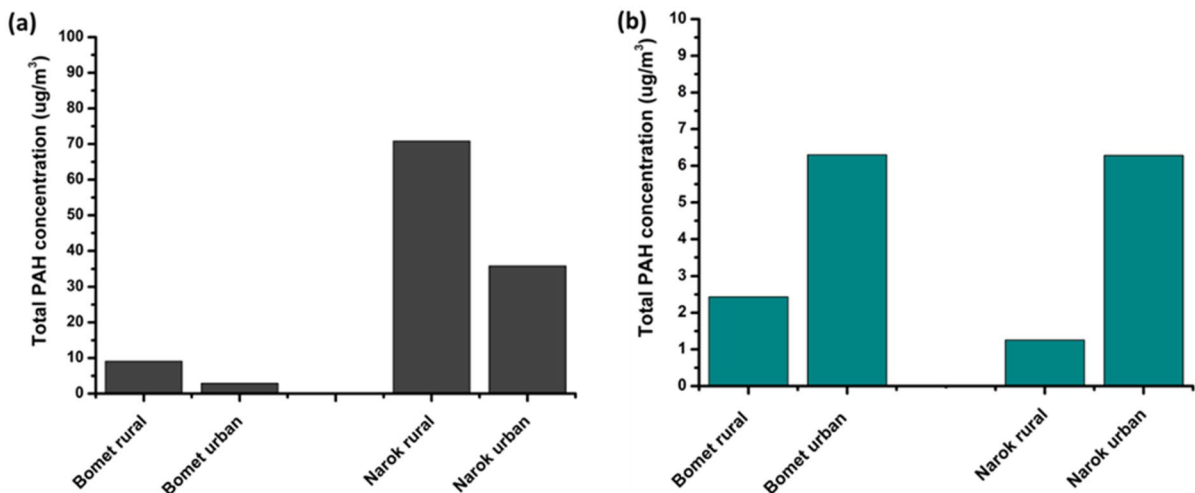

**Fig. 6** **a** Total average PAH concentrations in rural and urban kitchens.  $N_{(\text{Bomet rural})} = 4$ ,  $N_{(\text{Bomet urban})} = 3$ ,  $N_{(\text{Narok rural})} = 3$ ,  $N_{(\text{Narok urban})} = 6$ . **b** Total PAH ambient concentration from the

sampled rural and urban areas. LOQs were used in the average calculation for kitchen samples where [analyte] < LOQ

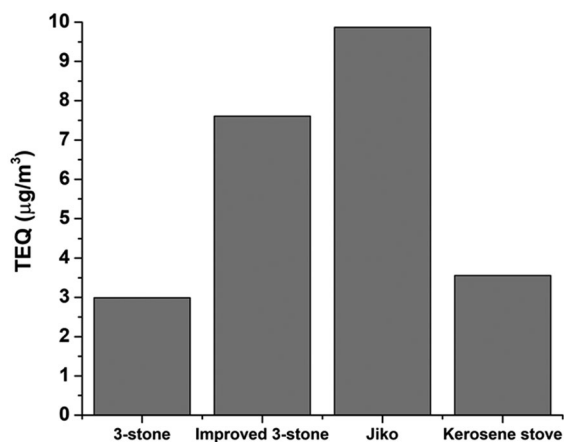

**Fig. 7** Average toxic equivalent (TEQ) concentrations relating to different combustion devices for each PAH.  $N_{(3\text{-stone})}=3$ ,  $N_{(\text{Improved } 3\text{-stone})}=3$ ,  $N_{(\text{Jiko})}=8$ ,  $N_{(\text{Kerosene stove})}=2$ . LOQs were used in the average calculation where [analyte] < LOQ

According to Nisbet and Lagoy (1992), the TEF value of two-ringed to four-ringed PAHs (LMW) is 0.001, except for anthracene with 0.01. While five-ringed to six-ringed PAHs (HMW) have TEF values ranging from 0.01 to 5. Table 6 also reveals the gradual increase in the carcinogenicity of the PAHs as their molecular weight increases, except for the unique potency of benzo[a]pyrene (Patra, 2003). The total TEQ value is mainly influenced by the concentration of heavier PAHs present at sampling sites, due


**Table 6** Relative toxicity and cancer potency of selected PAHs according to the US EPA and IARC (Nisbet & LaGoy, 1992; Patra, 2003)

PAH	Toxic equivalency factor	Relative cancer potency
Benzo[a]pyrene	1	1.0000
Chrysene	0.01	0.0044
Benzo[k]fluoranthene	0.1	0.020
Benzo[a]anthracene	0.1	0.145
Dibenzo[a,h]anthracene	5	1.11

to higher TEFs of these PAHs. Similar to this study, the presence of benzo[g,h,i]perylene (a 6-ringed PAH) in gas phase ambient samples collected by the roadside has been reported (Nadali et al., 2021). The presence of heavier PAHs in the ambient gas phase was attributed to light-duty vehicular emissions and pyrogenic activities. Figure 8 reveals that outdoor air samples also contained the 5-ring dibenz[a,h]anthracene, which is of concern. There is an overall higher proportion of HMW PAHs (dibenz[a,h]anthracene and benzo[ghi]perylene) in indoor samples from Narok County than in Bomet County. The presence of HMW PAHs in the gas phase can be a result of sampling near the source of emissions; thus, condensation and equilibration thereof onto particles had not yet occurred.

According to the International Agency for Research on Cancer (IARC), eight of the 16 priority

**Fig. 8** Relative percentage of 2-ring to 6-ring PAHs present in the gas phase of individual household and ambient air samples

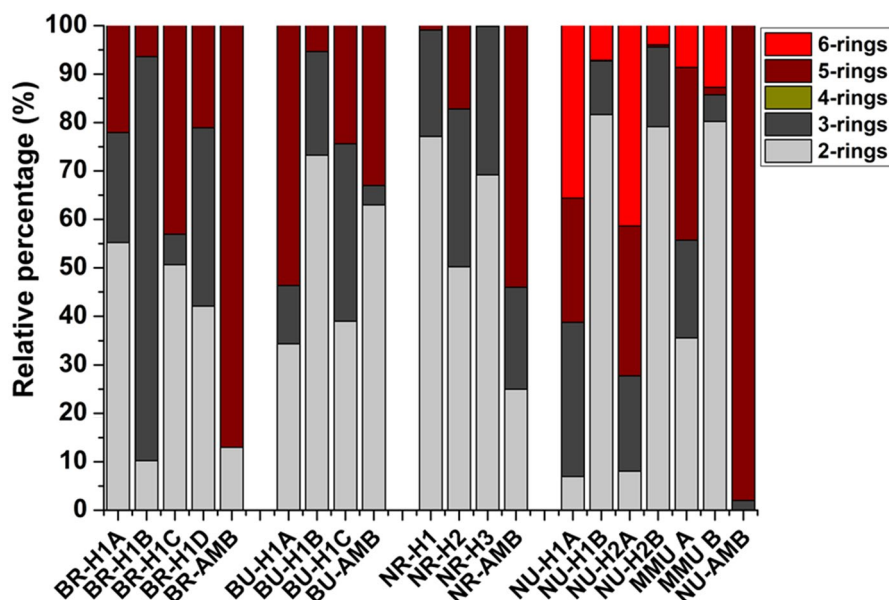

PAHs listed by the US EPA are potentially carcinogenic, namely benzo[a]pyrene, dibenzo[a,h]anthracene, benzo[a]anthracene, chrysene, benzo[b]fluoranthene, benzo[k]fluoranthene, indeno[1,2,3-cd]pyrene, and benzo[g,h,i]perylene (IARC, 2022; Wang et al., 2019). Two of these PAHs were above the limit of quantification in some samples collected during this study (namely dibenzo[a,h]anthracene and benzo[g,h,i]perylene) (Table S2).

## Conclusion

This study was performed to gain insight into the levels of PAHs released in the gas phase using local cooking devices, combusting wood, charcoal, and kerosene in the Narok and Bomet inland counties of Kenya. The evaluation of emission sources and corresponding health risk assessment was possible using low volume portable samplers with subsequent plunger-assisted solvent extraction, and GC–MS analysis of extracts. Although large variations in PAH emissions were observed between houses due to differences in fuels, combustion devices, climate, and household ventilation, it was clear that naphthalene is the main contributor to indoor PAHs. Charcoal combustion using jiko stoves contributed the highest PAH toxic equivalent quotient (TEQ) while firewood combustion (in 3-stone stoves) resulted in the highest total PAH emissions in the studied households. Generally, people living in manyattas (traditional houses) in rural Narok are exposed to higher doses of cooking-related gaseous PAHs. The ambient/outdoor gas phase air quality with respect to PAHs was better in rural areas of Narok and Bomet which may be attributed to relatively more anthropogenic activities and higher population density in urban areas that could negatively impact air quality. The Narok rural sampling location is near the Maasai Mara nature reserve, with much lower population density and limited local sources of PAHs, resulting in lower ambient rural pollution in comparison to Bomet. The difference in PAH levels reported in coastal and inland counties in Kenya was attributed to the difference in climatic conditions, fuel types, prevailing combustion devices, and type of households observed during the sampling campaign. The low molecular weight PAHs found at elevated levels in this study may react with atmospheric molecules such as O<sub>3</sub> and NO<sub>x</sub> to

form highly toxic derivatives (nitro-PAHs and oxy-PAHs); thus, monitoring thereof should be considered in future studies to allow for their inclusion in risk assessments. There is a need for local/on-site interactions with residents in the study area, and rural communities in developing countries in general, on the need for adequate ventilation in household kitchens and to promote the transition to cleaner fuels as integral aspects of pollution control and healthy living.

**Acknowledgements** We thank Mr Bakari Abdallah and Mr Moses Kehongo (both from Maasai Mara University) for their assistance during the sampling campaign.

**Funding** The authors received support from the host institutions (Maasai Mara University, Kenya and University of Pretoria, South Africa) and obtained funding assistance from the National Research Foundation of South Africa and the National Research Fund of Kenya (Grant #105807).

**Data availability** Data is available from the corresponding author upon request.

## Declarations

**Conflict of interest** The authors declare no competing interests.

## References

- Abdel-Shafy, H. I., & Mansour, M. S. M. (2016). A review on polycyclic aromatic hydrocarbons: Source, environmental impact, effect on human health and remediation. *Egyptian Journal of Petroleum*, 25, 107–123.
- Adeola, A. O., & Forbes, P. B. C. (2020). Assessment of reusable graphene wool adsorbent for the simultaneous removal of selected 2–6 ringed polycyclic aromatic hydrocarbons from aqueous solution. *Environmental Technology*, 1–14.
- Adkins, E., Tyler, E., Wang, J., Siriri, D., & Modi, V. (2010). Field testing and survey evaluation of household biomass cookstoves in rural sub-Saharan Africa. *Energy for Sustainable Development*, 14, 172–185.
- Bonjour, S., Adair-Rohani, H., Wolf, J., Bruce, N. G., Mehta, S., Prüss-Ustün, A., Lahiff, M., Rehfuess, E. A., Mishra, V., & Smith, K. R. (2013). Solid fuel use for household cooking: Country and regional estimates for 1980–2010. *Environmental Health Perspectives*, 121, 784–790.
- Boström, C. E., Gerde, P., Hanberg, A., Jernström, B., Johansson, C., Kyrklund, T., Rannug, A., Törnqvist, M., Victorin, K., & Westerholm, R. (2002). Cancer risk assessment, indicators, and guidelines for polycyclic aromatic hydrocarbons in the ambient air. *Environmental Health Perspectives*, 110(Suppl 3), 451–488.
- Chen, Y., Shen, G., Huang, Y., Zhang, Y., Han, Y., Wang, R., Shen, H., Su, S., Lin, N., Zhu, D., Pei, L., Zheng, X., Wu, J., Wang, X., Liu, W., Wong, M., & Tao, S. (2016).

- Household air pollution and personal exposure risk of polycyclic aromatic hydrocarbons among rural residents in Shanxi, China. *Indoor Air*, 26, 246–258.
- Chomane, J., Tekasakul, S., Tekasakul, P., Furuuchi, M., & Otani, Y. (2009). Effects of moisture content and burning period on concentration of smoke particles and particle-bound polycyclic aromatic hydrocarbons from rubberwood combustion. *Aerosol and Air Quality Research*, 9, 404–411.
- Dat, N.-D., & Chang, M. B. (2017). Review on characteristics of PAHs in atmosphere, anthropogenic sources and control technologies. *Science of the Total Environment*, 609, 682–693.
- Forbes, P. B., & Rohwer, E. R. (2009). Investigations into a novel method for atmospheric polycyclic aromatic hydrocarbon monitoring. *Environmental Pollution*, 157, 2529–2535.
- Forbes, P. B., & Rohwer, E. R. (2015). Chapter 5: Denuders, in *Comprehensive Analytical Chemistry vol. 70: Monitoring of Air Pollutants: Sampling, Sample Preparation and Analytical Techniques*, Patricia Forbes (Ed.), 153–181, Elsevier, Netherlands. <http://dx.doi.org/10.1016/bs.coac.2015.09.005>
- Forbes, P. B. C., Rohwer, E. R., Nsiband, S. A., Zimmermann, R., & Geldenhuys, G.-L. (2013). Characterisation of atmospheric semi-volatile organic compounds. *Clean Air Journal*, 23, 3–6.
- Gachanja, A. N., & Worsfold, P. J. (1993). Monitoring of polycyclic aromatic hydrocarbon emissions from biomass combustion in Kenya using liquid chromatography with fluorescence detection. *Science of the Total Environment*, 138, 77–89.
- Geldenhuys, G., Rohwer, E. R., Naudé, Y., & Forbes, P. B. C. (2015). Monitoring of atmospheric gaseous and particulate polycyclic aromatic hydrocarbons in South African platinum mines utilising portable denuder sampling with analysis by thermal desorption–comprehensive gas chromatography–mass spectrometry. *Journal of Chromatography A*, 1380, 17–28.
- Hellén, H., Kangas, L., Kousa, A., Vestenius, M., Teinilä, K., Karppinen, A., Kukkonen, J., & Niemi, J. V. (2017). Evaluation of the impact of wood combustion on benzo[a]pyrene (BaP) concentrations; ambient measurements and dispersion modeling in Helsinki, Finland. *Atmospheric Chemistry and Physics*, 17, 3475–3487.
- International Agency for Research on Cancer (IARC). (2022). IARC monographs on the evaluation of carcinogenic risks to humans. <https://monographs.iarc.fr/agents-classified-by-the-iarc/> Last updated on 3 March 2022 [Accessed 10 March 2022].
- Johansson, T. B., Patwardhan, A. P., Nakićenović, N., & Gomez-Echeverri, L. (2012). *Global energy assessment: Toward a sustainable future*. Cambridge University Press.
- Kalisa, E., Archer, S., Nagato, E., Bizuru, E., Lee, K., Tang, N., Pointing, S., Hayakawa, K., & Lacap-Bugler, D. (2019). Chemical and biological components of urban aerosols in Africa: Current status and knowledge gaps. *International Journal of Environmental Research and Public Health*, 16.
- Klepeis, N. E., Nelson, W. C., Ott, W. R., Robinson, J. P., Tsang, A. M., Switzer, P., Behar, J. V., Hern, S. C., & Engelmann, W. H. (2001). The National Human Activity Pattern Survey (NHAPS): A resource for assessing exposure to environmental pollutants. *Journal of Exposure Analysis and Environmental Epidemiology*, 11, 231–252.
- Lisouza, F. A., Owuor, O. P., & Lalah, J. O. (2011). Variation in indoor levels of polycyclic aromatic hydrocarbons from burning various biomass types in the traditional grass-roofed households in Western Kenya. *Environmental Pollution*, 159, 1810–1815.
- Lozier, M. J., Sircar, K., Christensen, B., Pillarisetti, A., Pennise, D., Bruce, N., Stanistreet, D., Naeher, L., Pilišvili, T., & Farrar, J. L. (2016). Use of temperature sensors to determine exclusivity of improved stove use and associated household air pollution reductions in Kenya. *Environmental Science & Technology*, 50, 4564–4571.
- Makonese, T., Ifegbesan, A. P., & Rampedi, I. T. (2018). Household cooking fuel use patterns and determinants across southern Africa: Evidence from the demographic and health survey data. *Energy & Environment*, 29, 29–48.
- Munyeza, C. F., Dikale, O., Rohwer, E. R., & Forbes, P. B. (2018). Development and optimization of a plunger assisted solvent extraction method for polycyclic aromatic hydrocarbons sampled onto multi-channel silicone rubber traps. *Journal of Chromatography A*, 1555, 20–29.
- Munyeza, C. F., Rohwer, E. R., & Forbes, P. B. (2019). A review of monitoring of airborne polycyclic aromatic hydrocarbons: An African perspective. *Trends in Environmental Analytical Chemistry*, 24, e00070.
- Munyeza, C. F., Osano, A. M., Maghanga, J. K., & Forbes, P. B. C. (2020). Polycyclic aromatic hydrocarbon gaseous emissions from household cooking devices: A Kenyan case study. *Environmental Toxicology and Chemistry*, 39, 538–547.
- Nadali, A., Leili, M., Bahrami, A., Karami, M., & Afkhami, A., (2021). Phase distribution and risk assessment of PAHs in ambient air of Hamadan, Iran. *Ecotoxicology and Environmental Safety*, 209, 111807
- Naudé, Y., van Aardt, M., & Rohwer, E. R. (2009). Multi-channel open tubular traps for headspace sampling, gas chromatographic fraction collection and olfactory assessment of milk volatiles. *Journal of Chromatography A*, 1216, 2798–2804.
- Nisbet, I. C., & LaGoy, P. K. (1992). Toxic equivalency factors (TEFs) for polycyclic aromatic hydrocarbons (PAHs). *Regulatory Toxicology and Pharmacology*, 16, 290–300.
- Oanh, K. N. T., Reutergerdth, L.-B., & Dung, N. T. (1999). Emission of polycyclic aromatic hydrocarbons and particulate matter from domestic combustion of selected fuels. *Environmental Science & Technology*, 33, 2703–2709.
- Ohura, T., Amagai, T., Fusaya, M., & Matsushita, H. (2004). Polycyclic aromatic hydrocarbons in indoor and outdoor environments and factors affecting their concentrations. *Environmental Science & Technology*, 38, 77–83.
- Orasche, J., Schnelle-Kreis, J., Schön, C., Hartmann, H., Ruppert, H., Arteaga-Salas, J. M., & Zimmermann, R. (2013). Comparison of emissions from wood combustion. Part 2: Impact of combustion conditions on emission factors and characteristics of particle-bound organic species and polycyclic aromatic hydrocarbon (PAH)-related toxicological potential. *Energy & Fuels*, 27, 1482–1491.



- Orasche, J., Seidel, T., Hartmann, H., Schnelle-Kreis, J., Chow, J. C., Ruppert, H., & Zimmermann, R. (2012). Comparison of emissions from wood combustion. Part 1: Emission factors and characteristics from different small-scale residential heating appliances considering particulate matter and polycyclic aromatic hydrocarbon (PAH)-related toxicological potential of particle-bound organic species. *Energy & Fuels*, *26*, 6695–6704.
- Osano, A., Maghanga, J., Munyeza, C. F., Chaka, B., Olal, W., & Forbes, P. B. C. (2020). Insights into household fuel use in Kenyan communities. *Sustainable Cities and Society*, *55*, 102039.
- Patelarou, E., & Kelly, F. J. (2014). Indoor exposure and adverse birth outcomes related to fetal growth, miscarriage and prematurity-A systematic review. *International Journal of Environmental Research and Public Health*, *11*, 5904–5933.
- Patra, D. (2003). Applications and new developments in fluorescence spectroscopic techniques for the analysis of polycyclic aromatic hydrocarbons. *Applied Spectroscopy Reviews*, *38*(2), 155–185.
- Pilishvili, T., Loo, J. D., Schrag, S., Stanistreet, D., Christensen, B., Yip, F., Nyagol, R., Quick, R., Sage, M., & Bruce, N. (2016). Effectiveness of six improved cookstoves in reducing household air pollution and their acceptability in Rural Eastern Kenya. *PLoS ONE*, *11*, e0165529.
- Rahnema, A., Sanchez, F., & Giordano, P. (2017). Alternative cooking fuels in Kenya: How can household decision-making be impacted? IESE Business School Working Paper No. 1177-E. Barcelona, Spain: IESE.
- Riva, G., Pedretti, E. F., Toscano, G., Duca, D., & Pizzi, A. (2011). Determination of polycyclic aromatic hydrocarbons in domestic pellet stove emissions. *Biomass and Bioenergy*, *35*, 4261–4267.
- Shen, G., Preston, W., Ebersviller, S. M., Williams, C., Faircloth, J. W., Jetter, J. J., & Hays, M. D. (2017). Polycyclic aromatic hydrocarbons in fine particulate matter emitted from burning kerosene, liquid petroleum gas, and wood fuels in household cookstoves. *Energy & Fuels*, *31*, 3081–3090.
- Shen, G., Tao, S., Chen, Y., Zhang, Y., Wei, S., Xue, M., Wang, B., Wang, R., Lu, Y., & Li, W. (2013). Emission characteristics for polycyclic aromatic hydrocarbons from solid fuels burned in domestic stoves in rural China. *Environmental Science & Technology*, *47*, 14485–14494.
- Shen, G., Wang, W., Yang, Y., Ding, J., Xue, M., Min, Y., Zhu, C., Shen, H., Li, W., & Wang, B. (2011). Emissions of PAHs from indoor crop residue burning in a typical rural stove: Emission factors, size distributions, and gas–particle partitioning. *Environmental Science & Technology*, *45*, 1206–1212.
- Shen, H., Huang, Y., Wang, R., Zhu, D., Li, W., Shen, G., Wang, B., Zhang, Y., Chen, Y., Lu, Y., Chen, H., Li, T., Sun, K., Li, B., Liu, W., Liu, J., & Tao, S. (2013). Global atmospheric emissions of polycyclic aromatic hydrocarbons from 1960 to 2008 and future predictions. *Environmental Science and Technology*, *47*, 6415–6424.
- Suter, M. K., Karr, C. J., John-Stewart, G. C., Gómez, L. A., Moraa, H., Nyatika, D., Wamalwa, D., Paulsen, M., Simpson, C. D., Ghodsian, N., Boivin, M. J., Bangirana, P., & Benki-Nugent, S. (2018). Implications of combined exposure to household air pollution and HIV on neurocognition in children. *International Journal of Environmental Research and Public Health*, *15*(1), 63.
- Tigabu, A. (2017). Factors associated with sustained use of improved solid fuel cookstoves: A case study from Kenya. *Energy for Sustainable Development*, *41*, 81–87.
- Titcombe, M. E., & Simcik, M. (2011). Personal and indoor exposure to PM<sub>2.5</sub> and polycyclic aromatic hydrocarbons in the southern highlands of Tanzania: A pilot-scale study. *Environmental Monitoring and Assessment*, *180*, 461–476.
- Umbuzeiro, G. A., Franco, A., Martins, M. H., Kummrow, F., Carvalho, L., Schmeiser, H. H., Leykauf, J., Stiborova, M., & Claxton, L. D. (2008). Mutagenicity and DNA adduct formation of PAH, nitro-PAH, and oxy-PAH fractions of atmospheric particulate matter from São Paulo, Brazil. *Mutation Research/genetic Toxicology and Environmental Mutagenesis*, *652*, 72–80.
- Viau, C., Hakizimana, G., & Bouchard, M. (2000). Indoor exposure to polycyclic aromatic hydrocarbons and carbon monoxide in traditional houses in Burundi. *International Archives of Occupational and Environmental Health*, *73*, 331–338.
- Wang, S.-W., Hsu, K.-H., Huang, S.-C., Tseng, S.-H., Wang, D.-Y., & Cheng, H.-F. (2019). Determination of polycyclic aromatic hydrocarbons (PAHs) in cosmetic products by gas chromatography-tandem mass spectrometry. *Journal of Food and Drug Analysis*, *27*, 815–824.
- World health organisation (WHO). (2016). *Ambient air pollution: A global assessment of exposure and burden of disease*. World Health Organization.
- Xia, Z., Duan, X., Tao, S., Qiu, W., Liu, D., Wang, Y., Wei, S., Wang, B., Jiang, Q., Lu, B., Song, Y., & Hu, X. (2013). Pollution level, inhalation exposure and lung cancer risk of ambient atmospheric polycyclic aromatic hydrocarbons (PAHs) in Taiyuan, China. *Environmental Pollution*, *173*, 150–156.
- Yury, B., Zhang, Z., Ding, Y., Zheng, Z., Wu, B., Gao, P., Jia, J., Lin, N., & Feng, Y. (2018). Distribution, inhalation and health risk of PM<sub>2.5</sub> related PAHs in indoor environments. *Ecotoxicology and Environmental Safety*, *164*, 409–415.
- Zou, L. Y., Zhang, W., & Atkiston, S. (2003). The characterisation of polycyclic aromatic hydrocarbons emissions from burning of different firewood species in Australia. *Environmental Pollution*, *124*, 283–289.

**Publisher's Note** Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

## Terms and Conditions

Springer Nature journal content, brought to you courtesy of Springer Nature Customer Service Center GmbH (“Springer Nature”). Springer Nature supports a reasonable amount of sharing of research papers by authors, subscribers and authorised users (“Users”), for small-scale personal, non-commercial use provided that all copyright, trade and service marks and other proprietary notices are maintained. By accessing, sharing, receiving or otherwise using the Springer Nature journal content you agree to these terms of use (“Terms”). For these purposes, Springer Nature considers academic use (by researchers and students) to be non-commercial.

These Terms are supplementary and will apply in addition to any applicable website terms and conditions, a relevant site licence or a personal subscription. These Terms will prevail over any conflict or ambiguity with regards to the relevant terms, a site licence or a personal subscription (to the extent of the conflict or ambiguity only). For Creative Commons-licensed articles, the terms of the Creative Commons license used will apply.

We collect and use personal data to provide access to the Springer Nature journal content. We may also use these personal data internally within ResearchGate and Springer Nature and as agreed share it, in an anonymised way, for purposes of tracking, analysis and reporting. We will not otherwise disclose your personal data outside the ResearchGate or the Springer Nature group of companies unless we have your permission as detailed in the Privacy Policy.

While Users may use the Springer Nature journal content for small scale, personal non-commercial use, it is important to note that Users may not:

1. use such content for the purpose of providing other users with access on a regular or large scale basis or as a means to circumvent access control;
2. use such content where to do so would be considered a criminal or statutory offence in any jurisdiction, or gives rise to civil liability, or is otherwise unlawful;
3. falsely or misleadingly imply or suggest endorsement, approval, sponsorship, or association unless explicitly agreed to by Springer Nature in writing;
4. use bots or other automated methods to access the content or redirect messages
5. override any security feature or exclusionary protocol; or
6. share the content in order to create substitute for Springer Nature products or services or a systematic database of Springer Nature journal content.

In line with the restriction against commercial use, Springer Nature does not permit the creation of a product or service that creates revenue, royalties, rent or income from our content or its inclusion as part of a paid for service or for other commercial gain. Springer Nature journal content cannot be used for inter-library loans and librarians may not upload Springer Nature journal content on a large scale into their, or any other, institutional repository.

These terms of use are reviewed regularly and may be amended at any time. Springer Nature is not obligated to publish any information or content on this website and may remove it or features or functionality at our sole discretion, at any time with or without notice. Springer Nature may revoke this licence to you at any time and remove access to any copies of the Springer Nature journal content which have been saved.

To the fullest extent permitted by law, Springer Nature makes no warranties, representations or guarantees to Users, either express or implied with respect to the Springer nature journal content and all parties disclaim and waive any implied warranties or warranties imposed by law, including merchantability or fitness for any particular purpose.

Please note that these rights do not automatically extend to content, data or other material published by Springer Nature that may be licensed from third parties.

If you would like to use or distribute our Springer Nature journal content to a wider audience or on a regular basis or in any other manner not expressly permitted by these Terms, please contact Springer Nature at

[onlineservice@springernature.com](mailto:onlineservice@springernature.com)